

# POWERTEC <sup>32lb</sup> Bag

## BATCH MIXES FOR GEO-LOOP GROUTERS

### TG Lite

Thermal Conductivity	TG Lite	PowerTEC	Water		Yield
			Btu/hr ft °F	50lb Bags	
<b>0.79</b>	4	1	60.0	29	70.4
<b>0.88</b>	3	1	45.0	21.25	53.4
<b>1.00</b>	2	1	33.0	15.25	39.2
<b>1.07</b>	2	1	32.0	14.75	38.2
<b>1.14</b>	2	1	31.0	14.25	37.2
<b>1.20</b>	2	1	30.0	13.75	36.4

### TG Select


Thermal Conductivity	TG Select	PowerTEC	Water		Yield
			Btu/hr ft °F	50lb Bags	
<b>1.40</b>	3	2	49.5	23.5	59.7
<b>1.50</b>	3	2	47.1	22.25	57.6
<b>1.60</b>	3	2	45.0	21.25	55.5

**WARNING:** Mixes are **extremely** sensitive to water volumes. It is strongly recommended that you use a water meter with all PowerTEC mixes.



## MEASUREMENT REFERENCE

Measure according to the figure below. Water is measured up from the weld line. **Power OFF the Geo-Loop Grouter before taking measurements inside the tank.**

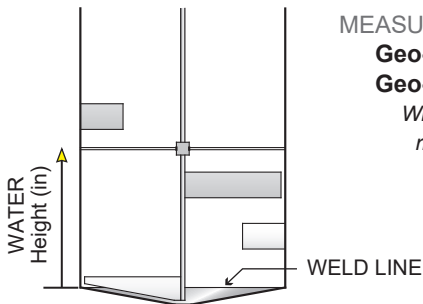

MEASUREMENTS FOR:

**Geo-Loop 50-500**

**Geo-Loop 40-500**

*With an 80 gal.  
mixing tank.*

## MIXING INSTRUCTIONS

**STEP 1:** Add Water.

**STEP 2:** Start mixer and add PowerTEC.

**STEP 3:** Add Thermal Grout and mix until uniform (approximately 2-3 minutes).

### Contact GeoPro:

Phone: (877) 580-9348

Fax: (877) 580-9371

[www.GeoProInc.com](http://www.GeoProInc.com)

### Contact Geo-Loop:

Phone: (800) 580-5965

Fax: (712) 434-2115

[www.Geo-Loop.com](http://www.Geo-Loop.com)

© 2018 GeoPro, Inc.

TG Lite and TG Select are trademarks of GeoPro, Inc.

Geo-Loop Grouter is a trademark of Geo-Loop, Inc., Aurelia, Iowa

D2018-1